


# SENSIT

# 2016

## PRODUCT GUIDE

### INDUSTRIAL SAFETY

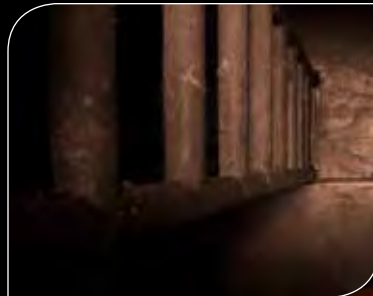



### **The Company:**

SENSIT Technologies is an ISO 9001:2008 compliant, family-owned business located in Valparaiso, Indiana. Since 1980, we have manufactured gas leak detection products that help protect life and property.

Today, as a result of continuous innovation and commitment to customer satisfaction, the company has grown to become a global supplier to several markets:

- Energy: Natural and Propane Gas Industries
- Emergency Response: Fire Services
- Industrial: Health, Safety and Maintenance
- Municipal: Waterworks and Infrastructure
- Service Contractors: HVAC and Plumbing

### **The Products:**

SENSIT gas detection products are best known for quickly and easily locating gas leaks and accurate measurement of toxic gases. Durability and low cost of ownership have added to our product popularity. SENSIT instruments can be found in many forms:

- Gas Leak Detection
- Personal Gas Monitors
- Infrastructure Detection

Our instruments meet approval agency standards from UL, ATEX, and CSA. Virtually all of our instruments can be linked to compliance reporting with the use of our Smart-Cal calibration and data management system. It is the final link for any total instrument program.

### **The People:**

The most important asset we have to offer is our incredible people. Our dedicated team of gas detection experts have centuries of combined experience in product development, production, sales and service. Complete customer satisfaction is our number one objective:

- Provide the exact product to meet your requirements
- Exceed your expectations for service
- Offer the lowest cost of ownership over the life of the product

### **The Future:**

SENSIT Technologies is committed to bringing new and innovative detection products to the global marketplace.



# INDUSTRIAL HEALTH & SAFETY PRODUCT GUIDE



<b>SENSIT® GOLD</b> Multi-Function Gas Detector .....	4
<b>SENSIT® GOLD 100</b> Multi-Function Gas Detector.....	5
<b>SENSIT® HXG-3 / HXG-3P</b> Gas Leak Detector .....	6
<b>SENSIT® HXG-2d</b> Gas Leak Detector .....	7
<b>SENSIT® CO</b> Carbon Monoxide Analyzer.....	8
<b>TRAK-IT® IIIa</b> Combustible Gas Indicator.....	9
<b>SENSIT® P400</b> Multi-Gas Personal Monitor.....	10
<b>SCAL-400</b> Calibration Station for SENSIT® P400 .....	11
<b>SENSIT® P100</b> Single-Gas Personal Monitor.....	12
<b>SCAL-100</b> Calibration Station for SENSIT® P100.....	13
<b>SMART-CAL™</b> Calibration Station .....	14
<b>SCAL-D / SCAL-N</b> Data Management Software .....	15

# SENSIT<sup>®</sup> GOLD

Designed to help you find the source of combustible gases fast!

## Displays Up To 4 Gases Simultaneously

- LEL (PPM Optional)
- Oxygen
- Carbon Monoxide
- Hydrogen Sulfide
- Hydrogen Cyanide (Optional)

## Standard Features

- Intrinsically Safe Design (Certified)
- Lowest Cost, Long Life Sensors
- Internal Pump
- Water/Dust Filter
- Push Button Operation
- Field Calibration
- Date/Time Display
- Calibration Alert
- Operation Memory
- Calibration Memory
- Infrared Download
- Audible/Visual Alarms
- Bright LCD Display
- Programmable Auto Shut Off

## Applications

- Combustible Gas Leak Detection
- Gas Leak Survey
- Underground Leak Pinpointing
- Carbon Monoxide Investigations
- Confined Space Monitoring
- Combustible Gas Measurements
- Pipeline Purging
- Method 21 Emissions Testing

## Partial List of Gases Sensed

- Butane
- Gasoline
- Methane
- Oxygen
- Carbon Monoxide
- Hydrogen Sulfide
- Natural Gas
- Propane



## STANDARD KIT

- Hard Carrying Case
- 3 "C" Batteries
- Extra Sensor Cap
- Wrist Strap
- Instruction Manual



## TO OPERATE:

1. Press Power
2. Wait 45 Seconds for Automatic Zeroing
3. Begin to Use

## SENSOR SPECIFICATIONS

TYPE	RESOLUTION	RANGE	ACCURACY
LEAK (CSA)	N/A	50-50,000 ppm	N/A
LEAK (UL)	N/A	10-50,000 ppm	N/A
PPM* (CSA)	1 or 10 ppm	0-2,000 ppm	±10%
PPM* (UL)	1 or 10 ppm	0-2,000 ppm	±10%
LEL	0.1% up to 2.0%	0-100% LEL	±10%
O <sub>2</sub>	0.1%	0-25%	±0.2% or 10%**
CO	1 ppm	0-2000 ppm	±5 ppm or 5%**
H <sub>2</sub> S	1 ppm	0-100 ppm	±2 ppm or 5%**
HCN	1 ppm	0-30 ppm	±1 ppm or 2.5%**

\*PPM Optional      \*\*Whichever is greater

## PRODUCT SPECIFICATIONS

Size:	11.5" x 3" x 2.32" (29.2 x 7.6 x 6.9 cm)
Weight:	1.2 lb. (0.5 kg)
Operational Temp:	0 to 120 F (-17.78 to 48.9° C)
Battery Life:	Alkaline: Approximately 12 hrs. Continuous

# SENSIT<sup>®</sup> GOLD 100

A multi-function gas detector ideal for inert and purging applications.

## Displays Up To

### 4 Gases Simultaneously

- LEL and %Volume (PPM Optional)
- Oxygen
- Carbon Monoxide
- Hydrogen Sulfide
- Hydrogen Cyanide (Optional)

### Selectable Gas Type

- Methane (Natural Gas)
- Propane

### Standard Features

- Intrinsically Safe Design (Certified)
- Lowest Cost, Long Life Sensors
- Internal Pump
- Water/Dust Filter
- Push Button Operation
- Field Calibration
- Date/Time Display
- Calibration Alert
- Operation Memory
- Calibration Memory
- Infrared Download
- Audible/Visual Alarms
- Bright Graphic Display
- Programmable Auto Shut Off

### Applications

- Combustible Gas Leak Detection
- Gas Leak Survey
- Underground Leak Pinpointing
- Carbon Monoxide Investigations
- Confined Space Monitoring
- Combustible Gas Measurements
- Pipeline Purging (NFPA 54 Compliant)
- Method 21 Emissions Testing
- Inert Gas Operations
- Replacement for Biosystems Cannonball 3

### Partial List of Gases Sensed

- Butane
- Gasoline
- Methane
- Oxygen
- Carbon Monoxide
- Hydrogen Sulfide
- Natural Gas
- Propane



### STANDARD KIT

- Hard Carrying Case
- 3 "C" Batteries
- Extra Sensor Cap
- Wrist Strap
- Instruction Manual



Patented

### TO OPERATE:

1. Press Power
2. Wait 45 Seconds for Automatic Zeroing
3. Begin to Use

### SENSOR SPECIFICATIONS

TYPE	RESOLUTION	RANGE	ACCURACY
LEAK	N/A	10-50,000 ppm	N/A
PPM*	1 or 10ppm	0-2,000 ppm	N/A
LEL	0.1%	0-100% LEL	±10%
% NAT GAS	0.1%	5-100% GAS	±5%
O2	0.1%	0-25%	±0.2% or 10%**
CO	1ppm	0-2000ppm	±5ppm or 5%**
H2S	1 ppm	0-100 ppm	±2 ppm or 5%**
HCN	1 ppm	0-30 ppm	±1 ppm or 2.5%**

\*PPM Optional

\*\*Whichever is greater

### PRODUCT SPECIFICATIONS

Size:	11.5" x 3" x 2.32" (29.2 x 7.6 x 6.9 cm)
Weight:	1.2 lb. (0.5 kg)
Operational Temp:	0 to 120 F (-17.78 to 48.9° C)
Battery Life:	Alkaline: Approximately 12 hrs. Continuous

# SENSIT<sup>®</sup> HXG-3/3P

Displays LEL and PPM readings simultaneously for accurate leak detection and analysis.

## HXG-3 Standard Features

- Intrinsically Safe Design (Certified)
- Displays LEL and PPM
- Audible/Visual Alarms
- Infrared Downloading
- Long-life, Low-Cost Sensor
- Simple Calibration

## HXG-3P Standard Features

- Intrinsically Safe Design (Certified)
- Internal Pump
- Water/Dust Filter
- Displays LEL and PPM
- Infrared Downloading
- Long-life, Low-Cost Sensor
- Simple Calibration



## Applications

- Locate Small Gas Leaks
- Area Monitoring
- Gas Leak Surveying
- Gas Line Purging
- Arson/Accelerant Detection

## Partial List of Gases Sensed

- Acetone
- Alcohol
- Ammonia
- Butane
- Gasoline
- Halon
- Hydrogen
- Industrial Solvents
- Jet Fuel - 2610
- Ethylene Oxide - 2610
- Lacquer Thinner
- Methane
- Natural Gas
- Propane
- Refrigerants



## STANDARD KIT

- Hard Carrying Case
- 3 "C" Batteries
- Wrist Strap
- Instruction Manual



## TO OPERATE:

1. Press Power
2. Wait 45 Seconds for Automatic Zeroing
3. Begin to Use

Patented

## SENSOR SPECIFICATIONS

TYPE	RESOLUTION	RANGE	ACCURACY
PPM*	1 or 10ppm	0-50,000 ppm	±10%
LEL	0.1%	0-100% LEL	±10%

\*PPM Optional

## PRODUCT SPECIFICATIONS

Size:	11.5" x 3" x 2.2" (29.21 x 7.62 x 5.89 cm)
Weight:	1.2 lb. (0.54 kg)
Operational Temp:	-4 to 122 F (-20 to 50° C)
Battery Life:	Alkaline: Approximately 25 hrs. Continuous

# SENSIT<sup>®</sup> HXG-2d

Gas leak detector with digital display for accurate measurement of gases.

## Standard Features

- Intrinsically Safe Design
- Push-Button Operation
- Field Calibration
- Backlit Display
- Adjustable Alarms
- Long-life, Low-Cost Sensor

## Applications

- Locate Small Gas Leaks
- Area Monitoring
- Gas Leak Surveying
- Gas Line Purging
- Chemical Detection
- Arson / Accelerant Detection

## Partial List of Gases Sensed

- Acetone
- Alcohol
- Ammonia
- Butane
- Ethylene Oxide
- Gasoline
- Halon
- Hydrogen
- Industrial Solvents
- Jet Fuel
- Lacquer Thinner
- Methane
- Natural Gas
- Propane
- Refrigerants

The SENSIT<sup>®</sup> HXG-2d cannot be used to check for carbon monoxide (CO) leakage.



## STANDARD KIT

- Carrying Pouch
- 3 "C" Batteries
- T10 Allen Wrench
- Instruction Manual



## SENSOR SPECIFICATIONS

TYPE	RESOLUTION	RANGE	ACCURACY
PPM*	10ppm	0-990 ppm	±10%
LEL	0.1%	0-100% LEL	±10%

\*PPM Optional

## PRODUCT SPECIFICATIONS

Size:	3.5" x 10" x 1.6" (8.9 x 25 x 4 cm)
Weight:	1.2 lb. (0.544 kg)
Operational Temp:	-4 to 104° F (-20 to 40° C)
Battery Life:	Alkaline: Approximately 50 hrs. Continuous

# SENSIT<sup>®</sup> CO

Use **SENSIT<sup>®</sup> CO** for Carbon Monoxide testing in residential and commercial buildings.

With its powerful rotary pump, hot air probe and bright LCD display, the **SENSIT<sup>®</sup> CO** is perfect for testing ambient air and hot gas samples.

Infrared communication allows printing of test results to a compact printer (accessory) or PC simple and convenient.

### Applications

- CO Investigations
- Flue Gas Testing
- Equipment Inspection & Testing

### Standard Features

- Internal Pump
- Flue Probe with Water Trap
- Audible/Visual Alarms
- Backlit LCD Display
- Automatic Zeroing
- Field Calibration
- Calibration Alerts
- Memory Storage
- Infrared Download
- Hard Carrying Case

### Optional Features

Oxygen Sensing:  
Display Oxygen and CO Simultaneously

Air-Free CO Reading:  
Automatically Calculates CO Based on  
Air-Free Calculation



### STANDARD KIT

- Hard Carrying Case
- 3 "C" Batteries
- Flue Probe
- 5 Foot Flexible Tubing
- Particle Filter
- Wrist Strap
- Instruction Manual



### TO OPERATE:

1. Press Power
2. Wait 45 Seconds  
for Automatic Zeroing
3. Begin to Use

Patented

### SENSOR SPECIFICATIONS

TYPE	RESOLUTION	RANGE	ACCURACY
CO	1ppm	0-2,000 ppm	±5ppm or 5%**
CO "Air Free"*	1ppm	0-5,000 ppm	±5ppm or 5%**
O2*	0.1%	0-25%	±0.2% or 10%**

\*Optional Configuration \*\*Whichever is greater

### PRODUCT SPECIFICATIONS

Size: 3" x 10" x 2.4" (7.6 x 25.4 x 6cm)  
 Weight: 1.1 pounds (0.5kg)  
 Operational Temp: -4 to 104° F (-20 to 40° C)  
 Battery Life: Alkaline: Approximately 30 hrs. Continuous



# TRAK-It<sup>®</sup> IIIa

**Combustible Gas Indicator designed for extreme working conditions.**

## Displays Up To 4 Gases Simultaneously

- LEL (%Volume and PPM Optional)
- Oxygen
- Carbon Monoxide
- Hydrogen Sulfide

## Standard Features

- Intrinsically Safe Design (Certified)
- 2-Speed Internal Pump
- Identifies Natural Gas vs Propane Gas
- Lowest Cost, Long Life Sensors
- LED Warning Lights
- Large Bright Graphic Display
- Loud Audible Alarm
- Optional 1600 Event Auto Log
- Exceptional Water Protection
- Long Battery Life
- Cost Effective As An Area Monitor
- Infrared Downloading
- Built-in Natural Gas and Propane Gas Calibration
- Stainless Steel Housing

## Applications

- Gas Line Purge
- Underground Leak Pinpointing
- Gas Leak Investigations
- Carbon Monoxide Investigations
- Confined Space Monitoring
- Combustible Gas Measurements

## Partial List of Gases Sensed

- Butane
- Gasoline
- Methane
- Oxygen
- Carbon Monoxide
- Hydrogen Sulfide
- Natural Gas
- Propane



## STANDARD KIT

- Padded Carrying Pouch
- 4 "C" Batteries
- Neck Strap
- External Water/Dirt Filter
- Instruction Manual
- Choice of Bar Hole Probe or Confined Space Probe

PADDED CARRYING POUCH

GRAPHIC DISPLAY

IR WINDOW

STATUS / ALARM LEDs

SPEAKER

NECK STRAP

OPERATIONAL BUTTONS

PROBE ASSEMBLY

Patent Pending

## TO OPERATE:

1. Press Power
2. Wait 45 Seconds for Automatic Zeroing
3. Begin to Use

## SENSOR SPECIFICATIONS

TYPE	RESOLUTION	RANGE	ACCURACY
PPM*	5ppm	0-2,000 ppm	±10%
LEL	0.1% up to 2%	0-100% LEL	±10%
% NAT GAS	0.1%	5.0-100% GAS	±5%
O2	0.1%	0-25%	±0.2% or 10%**
CO	1ppm	0-2000ppm	±5ppm or 5%**
H2S	1ppm	0-100ppm	±2ppm or 5%**
HCN	1ppm	0-30ppm	±2ppm or 5%**

\*PPM Optional

\*\*Whichever is greater

## PRODUCT SPECIFICATIONS

Size:	6.5" x 4" x 4.25" (16.5 x 10.2 x 10.8 cm)
Weight:	2.8 lb. (1.27 kg)
Operational Temp:	-4 to 104 F (-20 to 40° C)
Battery Life:	Alkaline: Approximately 40 hrs. Continuous

# SENSIT<sup>®</sup> P400

Multi-gas personal monitor designed to warn the user of hazardous gases in their working environment.

## P400 can be configured with 1 to 5 sensors.

### Standard Features

- Extremely Rugged, Intrinsically Safe Design
- Lowest Cost, Long Life Sensors
- Audible Alarm - 3 Tone
- Visual Alarm - 360° View
- Vibration Alarm
- STEL and TWA Alarms
- Compliance/Status Indicator
- Data Logging
- Easy Field Calibration
- Easy Clean Dust Pre-Filter
- Easy-Access Reusable Dust Filter
- Alkaline and/or NiMH Battery
- Limited 2-Year Warranty (Including Sensors)
- Extended Warranty Available

### P400 Optional Feature

- Immediate Detection System (IDS)
- Early warning to changes in gas concentrations

### Available Sensors

- Oxygen (O<sub>2</sub>)
- Carbon Monoxide (CO)
- Hydrogen Sulfide (H<sub>2</sub>S)
- Hydrogen Cyanide (HCN)
- Nitrogen Dioxide (NO<sub>2</sub>)
- Sulfur Dioxide (SO<sub>2</sub>)
- Combustible Gases



### STANDARD KIT

- Belt Clip
- Instruction Manual
- Calibration Adapter
- Dust Pre-Filter
- Alkaline Batteries

### KIT OPTIONS

- Confined-Space Entry Kit
- Calibration Station
- Calibration Kit
- Recharger Battery Pack
- Recharger Station



COMPLIANCE/  
STATUS INDICATOR

ALARM LEDs

SENSOR AREA

SENSOR FILTER

FUNCTION BUTTONS

SOUNDER

GRAPHIC DISPLAY w/BACK LIGHT

BELT CLIP (ON BACK)

#### TO OPERATE:

1. Press Power
2. Wait 30 Seconds for Automatic Zeroing
3. Begin to Use

Patented

### SENSOR SPECIFICATIONS

TYPE	RESOLUTION	RANGE	ACCURACY	RESPONSE T90 TIMES
LEL	0.1%	0-100	±10%	< 10 Sec
O <sub>2</sub>	0.1%	25%	±2% or 10%**	< 10 Sec
CO	1ppm	0-999*	±5ppm or 10%**	< 10 Sec
H <sub>2</sub> S	1ppm	0-100	±2ppm or 10%**	< 20 Sec
HCN	0.1ppm	0-30	±1ppm or 10%**	< 20 Sec
NO <sub>2</sub>	1ppm	0-250	±2ppm or 10%**	< 20 Sec
PH <sub>3</sub>	0.1ppm	0-10	±1ppm or 10%**	< 20 Sec
SO <sub>2</sub>	0.1ppm	0-20	±1ppm or 10%**	< 20 Sec
ETO	0.1ppm	0-10	±1ppm or 10%**	< 20 Sec

\*CO Extended Range Available 0ppm - 1999ppm.


\*\* Whichever is greater

### PRODUCT SPECIFICATIONS

Size:	5.2" x 3.2" x 1.7" (13.2 x 8.1 x 4.0 cm)
Weight:	12 oz. (340 g)
Operational Temp:	-4 to 122 F (-20 to 50° C)
Humidity:	10-90% RH (Non-condensing)
Power Source:	4 "AA" Alkaline or NiMH Recharger Pack
Battery Life:	24 Hr. Alkaline or 15 Hr. NiMH
Typical Response Time:	Initial < 2 Sec      T90 <10 Sec (LEL)
Sound:	98db @ 15cm

# SCAL-400

Automatically charges, bump tests and calibrates up to five SENSIT® P400 Gas Monitors simultaneously.

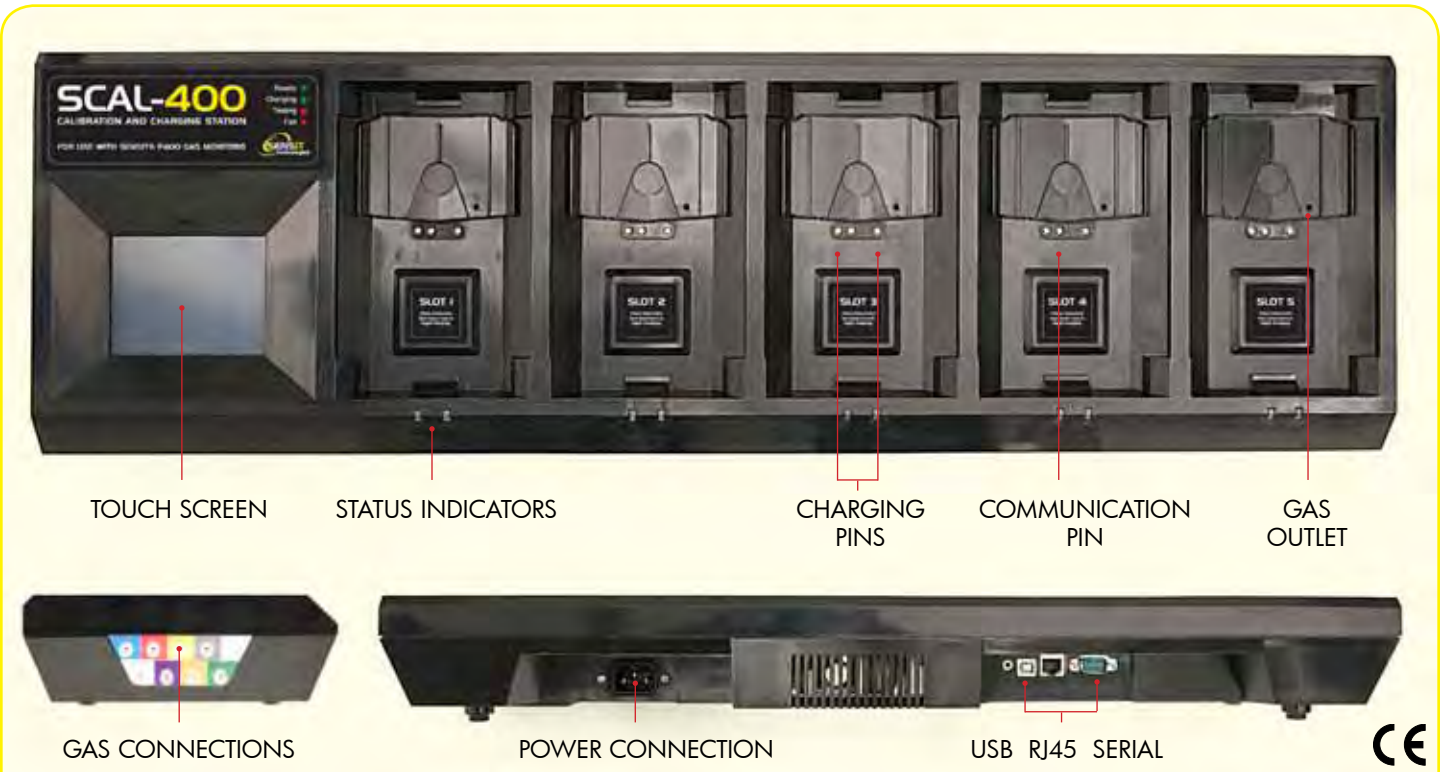

TOUCH SCREEN

STATUS INDICATORS

CHARGING PINS

COMMUNICATION PIN

GAS OUTLET

GAS CONNECTIONS

POWER CONNECTION

USB RJ45 SERIAL



All calibration data, time, date, and sensor performance data is stored in the calibrator for download to your computer. Data management software allows automatic uploading from calibrator, creates compliance reports and alerts selected personnel of overdue or failed calibrations.

#### Standard Features:

- Touch screen operation
- Test up to 5 instruments simultaneously
- Auto operation when instrument is installed
- Indication of pass or fail
- RJ45 intranet connection
- Compatible with Windows 7 and Windows XP Network

#### SCAL-400

##### Reporting Features:

- Instrument Test Past Due
- Instrument Failure Alerts
- Monthly Compliance Report
- Sensor Performance Data
- Optional Networking System
- Compatible with:
  - SCal-D™ (Desktop)
  - SCal-N™ (Network)
  - Data Management Software



**SCAL-400 is designed for use with SENSIT® P400 Gas Monitors**

- CH4 • CO • O2 • H2S
- HCN • NO2 • SO2 • Combustible Gases

#### SOFTWARE REQUIREMENTS

30MB Hard Drive Space  
Windows® XP, Vista, 7 Operating System  
Microsoft® Outlook (Preferred. Not Required)  
Microsoft® Excel (Preferred. Not Required)  
Microsoft® SQL Server (SQL Server Express Included)

#### PRODUCT SPECIFICATIONS

Size: 24" x 7" x 3" (61cm x 17.8cm x 7.6cm)  
Weight: 5.75 lb. (2.6 kg)  
Operational Temp: 40 – 122 F (5 to 50° C)  
Max. Inlet Pressure: 20 PSI  
Power: 100-240 VAC

# SENSIT<sup>®</sup> P100

Single gas personal monitor designed to warn the user of hazardous gases in their working environment.

## Standard Features

- Intrinsically Safe Design (Certified)
- One Button Operation
- Audible Alarm
- Visual Alarm
- Vibration Alarm
- STEL and TWA Alarms
- Alarm Event Memory
- Easy Field Calibration
- 2-Year Operation
- Refurbish Program Available After 2-years Of Operation
- Limited 2-Year Warranty (Including Sensor)
- Extended Warranty Available
- For use with SCAL-100 Test Stations

## Available Sensors

- Hydrogen Sulfide (H2S)
- Hydrogen Cyanide (HCN)
- Oxygen (O2)
- Carbon Monoxide (CO)
- Nitrogen Dioxide (NO2)
- Sulfur Dioxide (SO2)



## STANDARD KIT

- Belt Clip
- Instruction Manual



## TO OPERATE:

1. Press Power
2. Wait 30 Seconds for Automatic Zeroing
3. Begin to Use

Patented

## SENSOR SPECIFICATIONS

TYPE	RESOLUTION	RANGE	*CO Extended Display Option:
O2	0.1%	25%	Detection Range: 0ppm - .2% Volume (2000ppm equivalent)  Resolution: 1ppm for 0 - 999ppm 01% Volume for 1000ppm - 2000ppm
CO*	1ppm	0-999*	
H2S	1ppm	0-100	
HCN	0.1ppm	0-30	
NO <sub>2</sub>	0.1ppm	0-20	
SO <sub>2</sub>	0.1ppm	0-20	

## PRODUCT SPECIFICATIONS

Size:	3.81" x 2.31" x 0.8" (9.67 x 5.87 x 2 cm)
Weight:	3.6 oz. (105 g)
Operational Temp:	-4 to 104 F (-20 to 40° C)
Humidity:	15-90% RH (Non-condensing)
Power Source:	3.6V Lithium Battery
Battery Life:	2+ Years

# SCAL-100

Calibrates SENSIT® P100 Single Gas Monitors, stores data and manages instrument testing compliance.

All calibration data; time, date, sensor and pump performance data is stored in the calibrator for download to your computer. Data management software allows automatic uploading from calibrator, creates compliance reports and alerts selected personnel of overdue or failed calibrations.

## Design to Test/Calibrate SENSIT® P100 Monitors

- O<sub>2</sub>
- CO
- H<sub>2</sub>S
- HCN
- NO<sub>2</sub>
- SO<sub>2</sub>

## Standard Features:

- Indicates proper gas pressure
- Automatic operation when instrument is installed
- Indication of pass or fail
- RJ45 intranet connection
- Wall or desk mount
- Compatible with Windows 7 and Windows XP Network

## SMART-CAL™


### Reporting Features:

- Instrument Test Past Due
- Instrument Failure Alerts
- Monthly Compliance Report
- Sensor Performance Data
- Optional Networking System
- Compatible with:
  - SCal-D™ (Desktop)
  - SCal-N™ (Network)
- Data Management Software

## Available Test Gases\*

- Oxygen - O<sub>2</sub>
- Carbon Monoxide - CO
- Hydrogen Sulfide - H<sub>2</sub>S
- Hydrogen Cyanide - HCN
- Nitrogen Dioxide - NO<sub>2</sub>
- Sulfure Dioxide - SO<sub>2</sub>

\*Contact Sensit Technologies for more info.

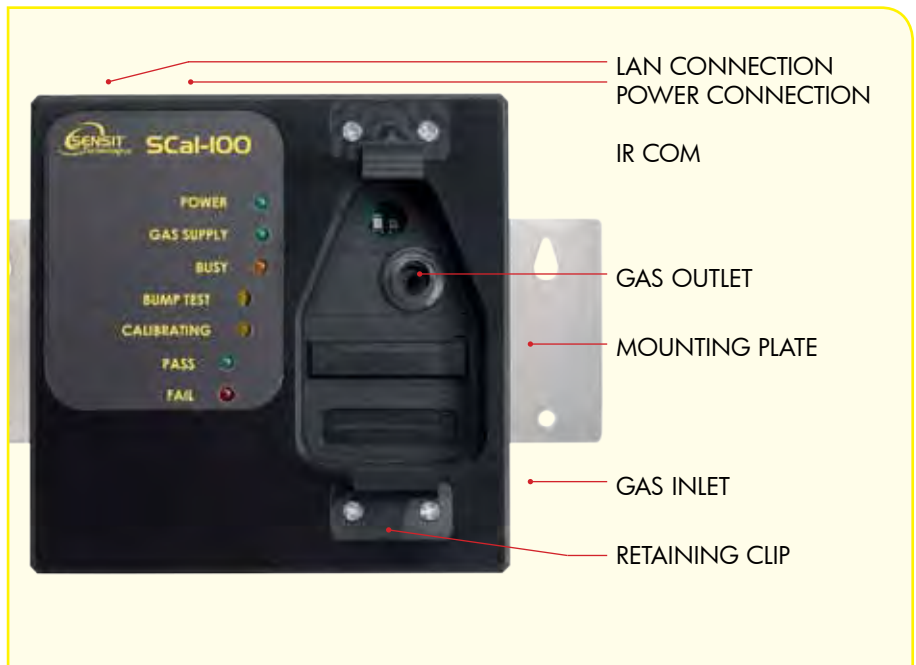

For use with Black P100 Models Only.



## SOFTWARE REQUIREMENTS

30MB Hard Drive Space  
Windows® XP or Later Operating System  
Microsoft® Outlook  
Microsoft Excel

## PRODUCT SPECIFICATIONS

Size: 6" x 6" x 1.75" (15.24cm x 15.24cm x 4.5cm)  
Weight: 2 lb. (0.9 kg)  
Operational Temp: 40 – 120 F (5 to 50° C)  
Max. Inlet Pressure: 20 PSI  
Power: 100-240VAC 50/60Hz 0.2A input with 2VDC 0.5A output

# SMART-CAL™

Calibrates SENSIT® and Trak-It® instruments, stores data and manages instrument testing compliance.

All calibration data; time, date, sensor and pump performance data is stored in the calibrator for download to your computer. Data management software allows automatic uploading from calibrator, creates compliance reports and alerts selected personnel of overdue or failed calibrations.

## SMART-CAL™

### Designed for use with:

- SENSIT® CO
- SENSIT® GOLD
- SENSIT® GOLD CGI
- SENSIT® GOLD G2
- SENSIT® HCN
- SENSIT® HXG-3
- SENSIT® HXG-3P
- SENSIT® PMD
- Trak-It® III CGI
- Trak-It® IIIa

## SMART-CAL™

### Standard Features:

- Push Button Operation
- Backlit LCD Display
- Line of Sight IR Communication
- Date/Time Display
- Automatic Date Adjustment
- Automatic Upload
- Calibration Memory
- Bottle Pressure Monitoring
- Compatible with Windows 7 and Windows XP Network

## SMART-CAL™



### Reporting Features:

- Instrument Test Past Due
- Instrument Failure Alerts
- Monthly Compliance Report
- Sensor Performance Data
- Optional Networking System
- Compatible with:
  - SCal-D™ (Desktop)
  - SCal-N™ (Network)
- Data Management Software

### Available Test Gases\*

- PPM (Methane)
- LEL (Methane)
- LEL (Propane)
- % Volume
- Carbon Monoxide - CO
- Hydrogen Cyanide - HCN
- Hydrogen Sulfide - H2S
- Oxygen - O2

\*Contact Sensit Technologies for more info.

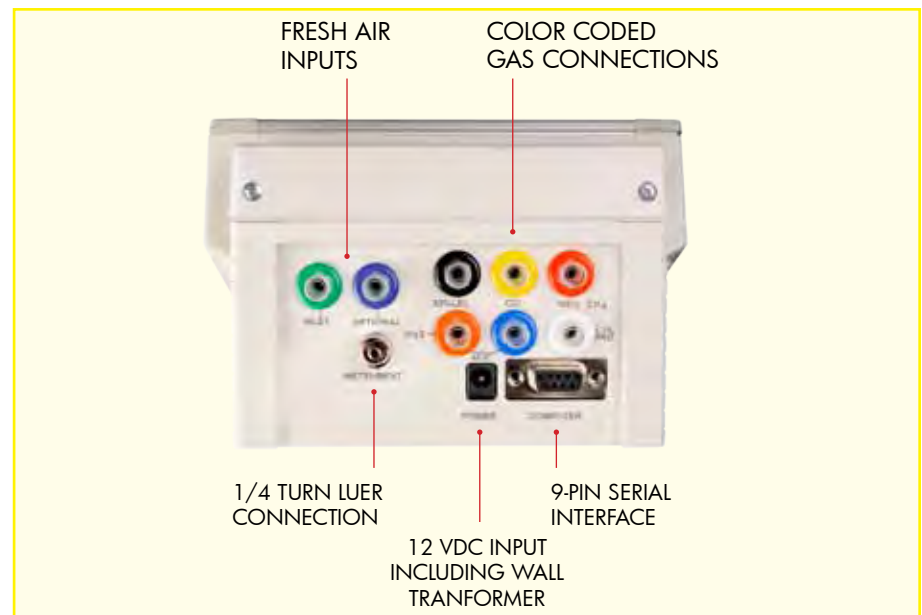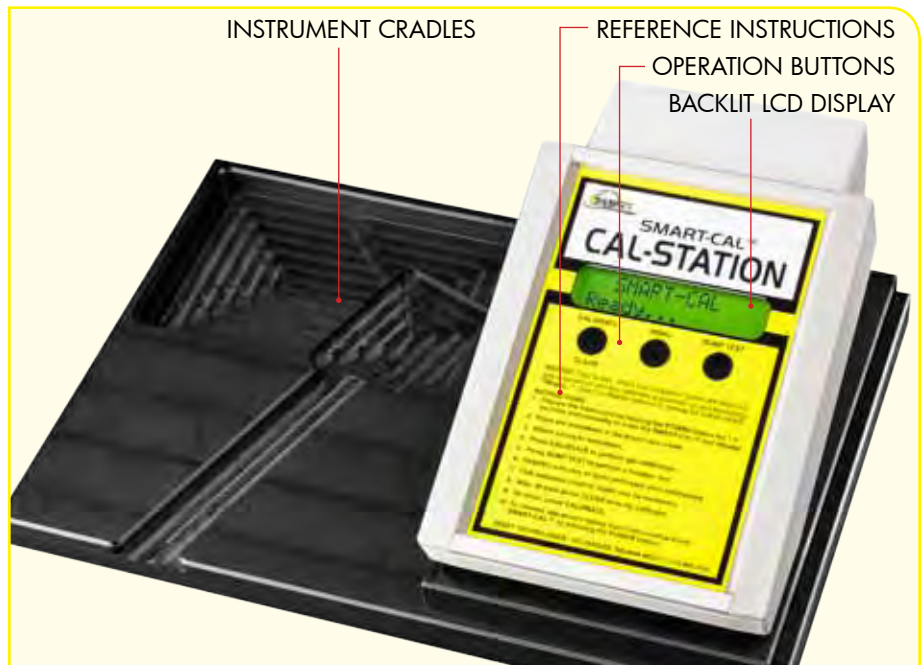

## SOFTWARE REQUIREMENTS

30MB Hard Drive Space  
Windows® XP or Later Operating System  
Microsoft® Outlook  
Microsoft Excel



## PRODUCT SPECIFICATIONS

Size: 10.75" x 6.75" x 4.5" (27.3cm x 17.1cm x 11.4cm)  
Weight: 2.5 lb. (1.13 kg)  
Operational Temp: 32 to 120 F (0 to 48.9° C)  
Max. Inlet Pressure: 20 PSI  
Power: 100 - 240VAC Input with 12VDC Output

# SCAL-D / SCAL-N

Data Management Software for use with SMART-CAL™ & SCal-100 Calibration Stations

**SCal is the Data Management Software used to download data from Calibration Stations.**

Various reports and alerts can be viewed, printed, emailed or stored as an Excel spreadsheet. When configured it will automatically alert operators and supervisors of important data depending on their preference. SCal provides an easy to use interface and content sensitive help with FAQ's for quick response.

**SCal-D** is the Desktop version of the software. This single-user software application comes standard with Calibration Stations.

**SCal-N** is the Network version of the software. SCal-N is sold separately with a multi-year license. Use SCal-N to download data from remotely located Calibration Station(s). Data is stored in SQL Server.

**SCal-N is divided into two categories:**

#### **Admin Application:**

The Admin application is the host for the automatic downloading of remote Calibration Stations that have the proper communication hardware installed. This program is SQL Server based. You must install and use only one copy of SCal-N as Admin.

#### **User Application:**

The User Application allows viewing of selected data stored in the Server database from any computer that has access or privileges. An authorized login and password to the SQL Server is required for each User application installed.

\*Contact Sensit Technologies for more info.



#### **HARDWARE REQUIREMENTS**

##### **SMART-CAL™**

##### **Design for use with:**

- SENSIT® CO
- SENSIT® GOLD
- SENSIT® GOLD CGI
- SENSIT® GOLD G2
- SENSIT® HCN
- SENSIT® HXG-3
- SENSIT® HXG-3P
- SENSIT® PMD
- Trak-It® III CGI
- Trak-It® IIIa



##### **SCAL-100**

##### **Design for use with:**

- SENSIT® P100 (Black Housing)



#### **SOFTWARE REQUIREMENTS**

- 30MB Hard Drive Space
- Windows® XP or Later Operating System
- Microsoft® Outlook
- Microsoft Excel

#### **PRODUCT SPECIFICATIONS**

- SCAL-D or SCAL-N Software CD (User Guide Included on Disc)
- Printed Installation Guide